

# MV-SC2016EM

## 1.6 MP Mono Vision Sensor



### Introduction

With built-in positioning and measurement algorithms, MV-SC2016EM vision sensor can realize counting, existence, measurement detection, and recognition. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

### Key Feature

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to for counting, existence, measurement detection, and recognition.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including RS-232, TCP, UDP, FTP, Profinet, Modbus, Ethernet/IP, etc.


### Available Model

- 8 mm focal length: MV-SC2016EM-08S-WBN
- 12.4 mm focal length: MV-SC2016EM-12S-WBN
- 14.8 mm focal length: MV-SC2016EM-15S-WBN

### Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

### Dimension

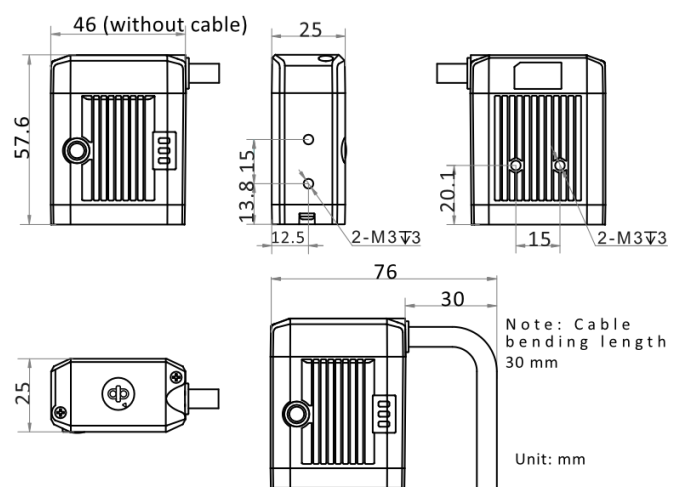

## Specification

Model	MV-SC2016EM-08S-WBN	MV-SC2016EM-12S-WBN	MV-SC2016EM-15S-WBN
<b>Tool</b>			
<b>Vision tool</b>	<ul style="list-style-type: none"> <li>● Count: Spot count , edge count, pattern count, and contour count</li> <li>● Existence: Circle existence, line existence, spot existence, edge existence, pattern existence, and contour existence</li> <li>● Location: Fixture</li> <li>● Logic tool: Condition judge, logic judge, character comparison, calculator, and combination judge</li> <li>● Measurement: L2L angle, diameter measurement, brightness average value, contrast measurement, width measurement, P2L measurement, greyscale size, line angle, and edge width measurement</li> <li>● Recognition: OCR and classification registration</li> </ul>		
<b>Solution capacity</b>	Supports solution importing and exporting, up to 8 solutions and 40 modules can be stored.		
<b>Communication protocol</b>	RS-232, TCP, UDP, FTP, PROFINET, ModBus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
<b>Camera</b>			
<b>Sensor type</b>	CMOS, global shutter		
<b>Pixel size</b>	3.45 μm × 3.45 μm		
<b>Sensor size</b>	1/2.9"		
<b>Resolution</b>	1408 × 1024		
<b>Max. frame rate</b>	60 fps		
<b>Dynamic range</b>	71.4 dB		
<b>SNR</b>	41 dB		
<b>Gain</b>	0 dB to 15 dB		
<b>Exposure time</b>	16 μs to 1 sec		
<b>Pixel format</b>	Mono 8		
<b>Mono/color</b>	Mono		
<b>Electrical features</b>			
<b>Data interface</b>	Fast Ethernet (100 Mbit/s)		
<b>Digital I/O</b>	17-pin M12 connector provides power, Ethernet, serial port, and digital I/O, including non-isolated input × 1 (Line 2), non-isolated output × 1 (Line 3), configurable non-isolated I/O × 2 (Line 0/1), and RS-232 × 1		
<b>Power supply</b>	12 VDC to 24 VDC		
<b>Max. power consumption</b>	Approx. 22 W @ 24 VDC		
<b>Mechanical</b>			
<b>Lens mount</b>	M12-mount, adjusting focus manually supported		
<b>Focal length</b>	8 mm	12.4 mm	14.8 mm
<b>Lens cap</b>	Transparent lens cap		
<b>Light source</b>	White LED lamp		
<b>Indicator</b>	Power indicator (PWR), network indicator (LNK), and status indicator (STS)		
<b>Dimension</b>	46 mm × 57.6 mm × 25 mm (1.8" × 2.3" × 1.0")		
<b>Weight</b>	Approx. 220 g (0.5 lb.)		
<b>Ingress protection</b>	IP65 (under proper installation of lens and wiring)		
<b>Temperature</b>	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
<b>Humidity</b>	20% RH to 95% RH (no condensation)		
<b>General</b>			
<b>Client software</b>	SCMVS		
<b>Certification</b>	CE, KC		

## Detection Range

Focal Length	Installation Distance	Field of View	Single Pixel Accuracy
8 mm	80 mm	47.62 mm × 34.64 mm	0.034 mm
	2000 mm	1190.59 mm × 865.88 mm	0.846 mm
12.4 mm	200 mm	78.35 mm × 56.98 mm	0.056 mm
	2000 mm	783.48 mm × 569.81 mm	0.556 mm
14.8 mm	270 mm	88.62 mm × 64.45 mm	0.063 mm
	2000 mm	656.43 mm × 477.41 mm	0.466 mm

